

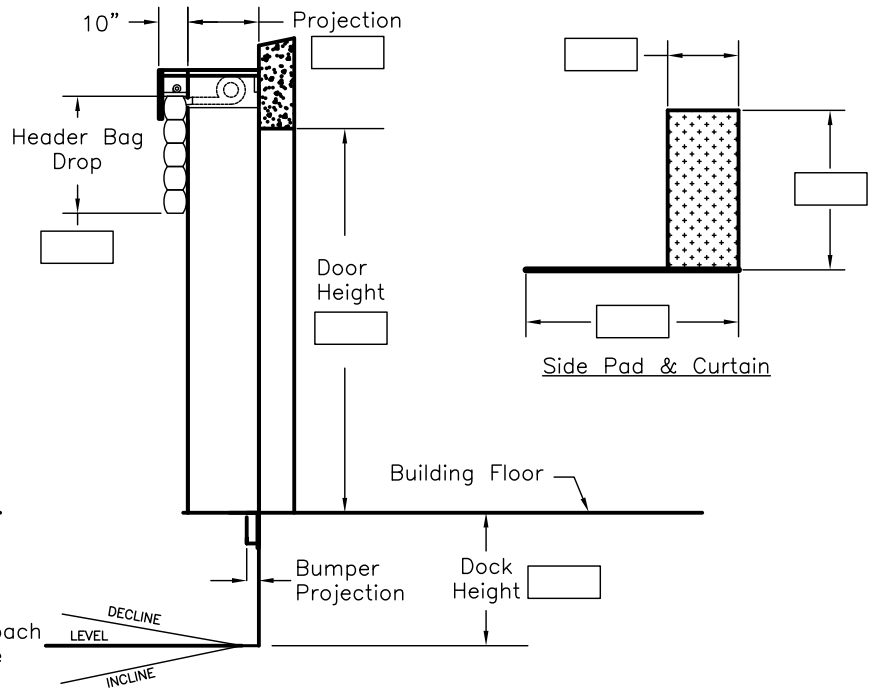


MODEL FFI-750 FOAM SIDED INFLATABLE HEADER DOCK SHELTER

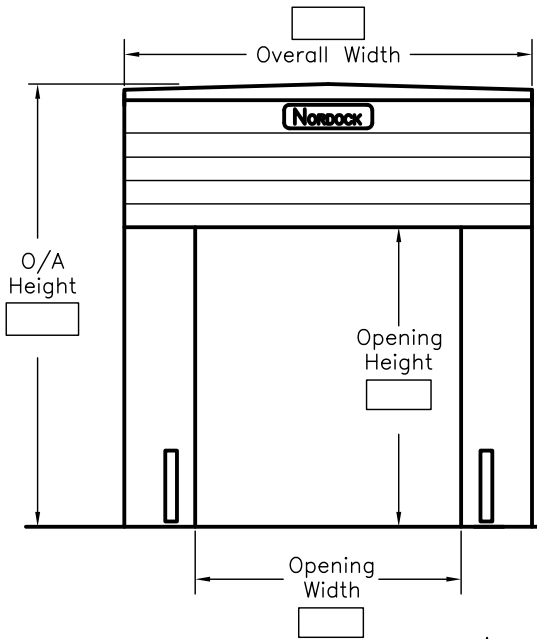

FEATURE SUMMARY

- Selection of High Tear Abrasion Resistant Fabrics
- Pressure Treated Backing Lumber & Head Frame
- Polyurethane Foam Core With 99% Memory
- Double Lock Stitched With High Strength Thread
- Yellow Guide Stripes for Driver Positioning
- Bottom Draft Pads
- Galvanized Steel Mounting Hardware
- 1/2 HP 115V Motor Blower with Galvanized Hood

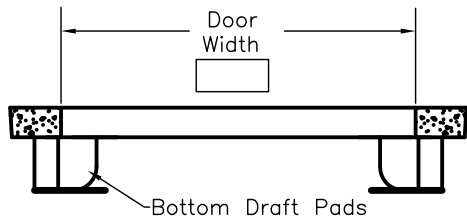

SITE DIMENSIONS

DOOR WIDTH: _____ "

DOOR HEIGHT: _____ "

DOCK HEIGHT: _____ "

BUMPER PROJECTION: _____ "

APPROACH GRADE: _____ % SLOPE

LEVEL DECLINE INCLINE

GRADE WALL EXTENSION: _____ "

BUILDING WALL SETBACK: _____ "

ORDER INFORMATION

BILL TO: _____

SHIP TO: _____

ORDER DATE: _____ QUANTITY: _____

COST EACH: _____ TOTAL COST: _____

PURCHASE ORDER NO. _____

APPROVED: _____

SHELTER SPECIFICATIONS/OPTIONS

PANEL FABRIC: 22OZ. VINYL 40 OZ. VINYL
50 OZ. WT-90

UNIT WIDTH: 144" *140" OTHER _____ "

UNIT O/A HEIGHT: 140" OTHER _____ "

SIDE CURTAIN: 27" *25" OTHER _____ "
REINFORCED EDGE

SIDE PAD: HEIGHT: _____ " WIDTH: _____ "
PROJECTION: 18" 24" 30" OTHER _____ "

HEAD BAG: FABRIC: 16 OZ. VINYL
48" DROP OTHER _____ "

VOLTAGE: 120/1/60 OTHER _____

OPTIONS: STEEL BACK & FRAME
TERMINATOR™ GAP SEAL

*18" PROJECTION STANDARD DIMENSIONS

OTHER: _____

NOTE: TERMINATOR SEALS ARE DESIGNED FOR STANDARD 102" WIDE TRAILERS AND REQUIRES THE VERTICAL SIDE CURTAINS TO BE 14" IN FRONT OF DOCK BUMPERS WITH A 90" CLEAR OPENING WIDTH.