

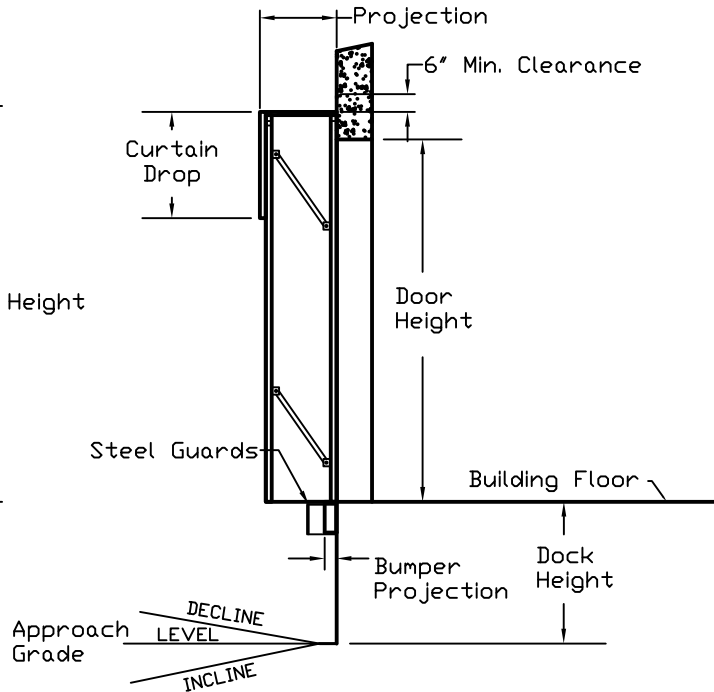


RETRACTAFRAME™ SERIES MODEL RF DOCK SHELTER

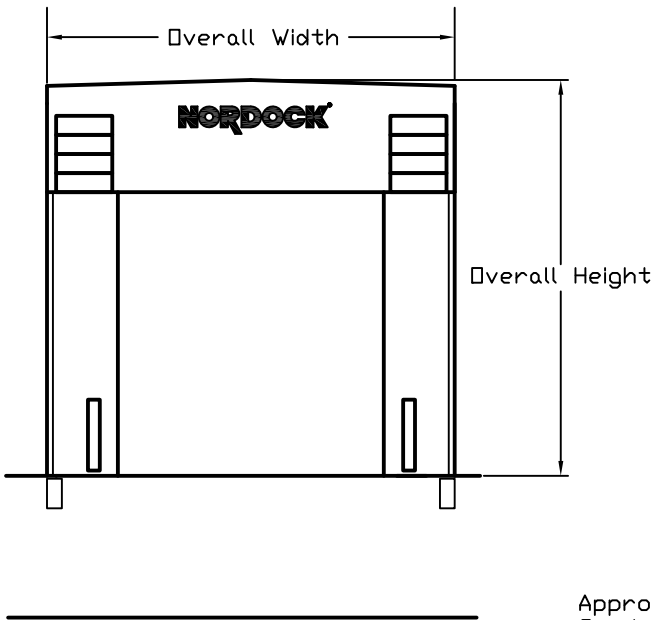

FEATURE SUMMARY

- Selection of High Tear Abrasion Resistant Fabrics
- Tubular Steel Frame Construction
- Double Stitched With High Strength Thread
- Yellow Guide Stripes for Driver Positioning
- Bottom Draft Pads
- Galvanized Steel Mounting Hardware

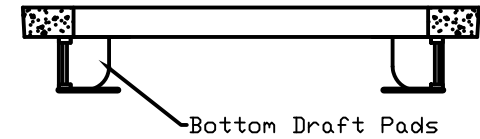

SITE DIMENSIONS

DOOR WIDTH: _____ "

DOOR HEIGHT: _____ "

DOCK HEIGHT: _____ "

BUMPER PROJECTION: _____ "

APPROACH GRADE: _____ % SLOPE

INCLINE DECLINE LEVEL

GRADE WALL EXTENSION: _____ "

BUILDING WALL SETBACK: _____ "

ORDER INFORMATION

BILL TO: _____

SHIP TO: _____

ORDER DATE: _____ QUANTITY _____

COST EACH: _____ TOTAL COST _____

PURCHASE ORDER NO. _____

SALES PERSON: _____

SHELTER SPECIFICATIONS/OPTIONS

PANEL FABRIC: 22OZ. VINYL
 40 OZ. VINYL
 50 OZ. WT-90

UNIT WIDTH: 138" OTHER _____ "

UNIT HEIGHT: 132" OTHER _____ "

SIDE CURTAIN: 24" WIDE OTHER _____ "

BOTTOM DOUBLE LAYER

REINFORCED EDGE

UNIT PROJECTION: 24" OTHER _____ "

HEAD CURTAIN: 36" DROP OTHER _____ "

TOUGH-SPLIT™ GUSSETS

OPTION: HOT DIP GALVANIZED FRAME

TERMINATOR™ GAP SEAL

OTHER: _____

NOTE: TERMINATOR SEALS ARE DESIGNED FOR STANDARD 102" WIDE TRAILERS AND REQUIRES THE VERTICAL SIDE CURTAINS TO BE 14" IN FRONT OF DOCK BUMPER WITH A 90" CLEAR OPENING WIDTH.