


## AIRDOCK® - CA Series Dockleveler STANDARD 19" Pit Construction Details

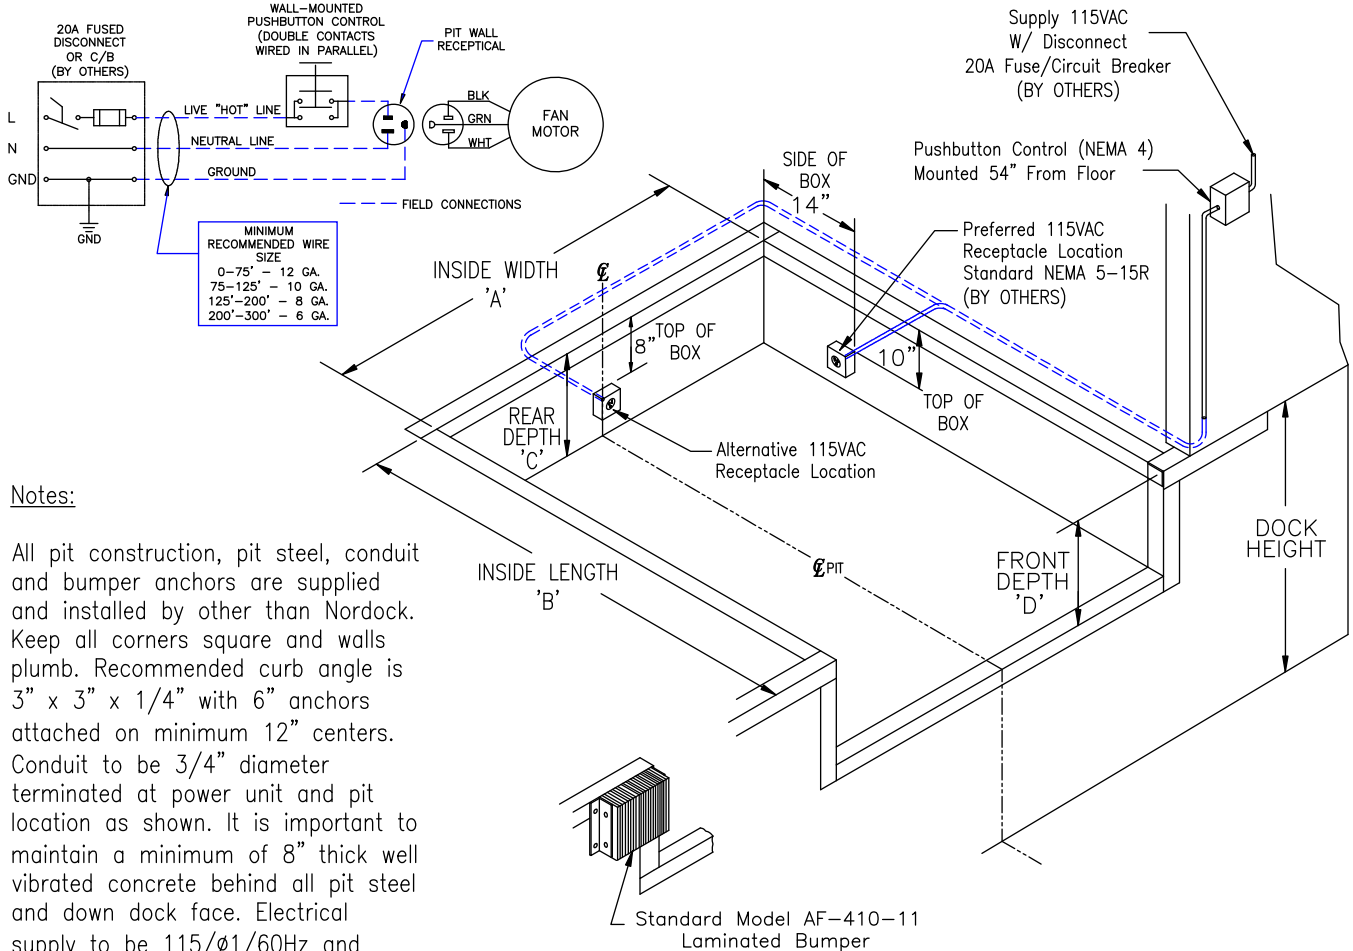

### Notes:

All pit construction, pit steel, conduit and bumper anchors are supplied and installed by other than Nordock. Keep all corners square and walls plumb. Recommended curb angle is 3" x 3" x 1/4" with 6" anchors attached on minimum 12" centers. Conduit to be 3/4" diameter terminated at power unit and pit location as shown. It is important to maintain a minimum of 8" thick well vibrated concrete behind all pit steel and down dock face. Electrical supply to be 115/ø1/60Hz and wired as shown.

Nominal Size	6' x 6'	6.5' x 6'	7' x 6'	6' x 8'	6.5' x 8'	7' x 8'	6' x 10'	6.5' x 10'	7' x 10'
Pit Width 'A'	74"	80"	85"	74"	80"	85"	74"	80"	85"
Pit Length 'B'	63"	63"	63"	87"	87"	87"	111"	111"	111"
* Rear Pit Depth 'C'	* 19-1/2"	* 19-1/2"	* 19-1/2"	* 19-1/2"	* 19-1/2"	* 19-1/2"	* 19-1/2"	* 19-1/2"	* 19-1/2"
* Front Pit Depth 'D'	* 20"	* 20"	* 20"	* 20"	* 20"	* 20"	* 20"	* 20"	* 20"

\* Note: Dimensions are for 19" Dockleveler depth. For 23", Refer to form 49-0120.

Model Number Composition: CA-(Nominal Size)-(Capacity) (i.e. CA-78-35)

Model:	Quantity:
25k   30k   35k   40k   45k   50k   Other: _____	
Lip:   16"   18"   20"   Taper	
Job Reference:	
Location:	

### CUSTOMER APPROVAL

Customer \_\_\_\_\_

Approved

Approved as noted

Signature \_\_\_\_\_

Position \_\_\_\_\_

Date \_\_\_\_\_