



DEDICATED PEOPLE - SUPERIOR PRODUCTS

405 LAKE ROAD, UNIT 2
 BOWMANVILLE, ON L1C 4P8
 T: 905-697-4276 F: 905-697-6422
 www.nordockinc.com

SCISSOR AND DOCK LIFT TRANSMITTAL

R1-05-2015

DATE:

EMAIL:

SALES PERSON:

QUOTED BY:

PHONE:

FAX:

BILL TO:

SHIP TO: SAME AS BILLING ADDRESS

END USER:

P.O. #:

REQUEST SHIP DATE:

SHIP VIA:

WEIGHT

PPD

COL

3RD

MODEL SPECIFICATION: _____ **QUANTITY:** _____

CAPACITY: 1,000lbs 2,500lbs 4,000lbs 5,000lbs 6,000lbs 8,000lbs 10,000lbs 12,000lbs
 15,000lbs 20,000lbs OTHER: _____

DECK SIZE: WIDTH (H): _____" LENGTH (G): _____" CHECKER PLATE SMOOTH PLATE BEVELLED SIDES

LOWERED HEIGHT (LH): 7" 8" 10" 12" 14" 16" 18" 20" OTHER: _____"
 TRAVEL (T): _____" RAISED HEIGHT (RH): _____"

LIP OPTIONS:
 NONE
1 WIDTH (E): _____" LENGTH (F): _____" LIP LOCATION: A B C D
2 WIDTH (E): _____" LENGTH (F): _____" LIP LOCATION: A B C D
 SPRING ASSISTED HYDRAULIC POWERED MATERIAL: STEEL ALUMINUM SPLIT

GUARD RAILS: OPEN CLOSED BOLT ON STAKE POCKETS ALUMINUM
 NONE RAIL LOCATION: A B C D SHORTENED LENGTH: _____" POST LOCATION: _____"


CONTROLS: NEMA 4 PUSH BUTTONS ON COIL CORD PUSH BUTTONS ON 8' CABLE PUSH BUTTONS ON PANEL COVER
 FOOT PEDAL CONTROL ON 8' CABLE PUSH BUTTONS ON DECK POST PUSH BUTTONS ON DISCONNECT
 FUSED DISCONNECT ON PANEL ON/OFF SELECTOR

VOLTAGE: SINGLE PHASE 120V 208V 240V
 THREE PHASE 208V 240V 480V 600V OTHER: _____ HP: _____

OPTIONS: PERIMETER SAFETY STOP LOCATION: A B C D
 ROLL-OFF STOP LOCATION: A C HYD MECH
 ROLLER CURTAIN LOCATION: A B C D
 LOWER TRAVEL LIMIT SWITCH: FIXED ADJUSTABLE ACCORDIAN CURTAIN - 4 SIDES
 UPPER TRAVEL LIMIT SWITCH: FIXED ADJUSTABLE PORTABILITY KIT

LIST PRICE

LIFT DIMENSIONS:

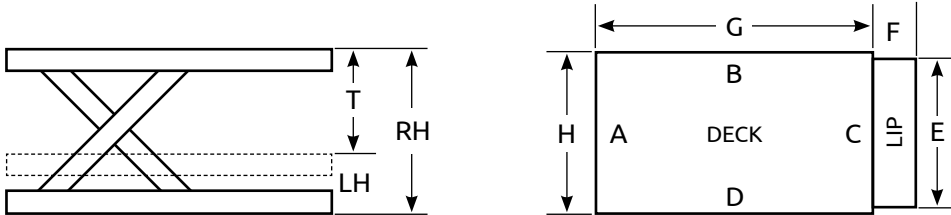

SPECIAL REQUIREMENTS:

| | |
|----------------------|--|
| LIST PRICE | |
| SPECIAL REQUIREMENTS | |
| TOTAL LIST EACH | |
| DISCOUNT (%) | |
| TOTAL DISCOUNT | |
| TOTAL NET EACH | |
| X QUANTITY | |
| SUB-TOTAL | |
| FREIGHT | |
| TAX AMOUNT (\$) | |
| TOTAL | |

TOTAL

TOTAL