
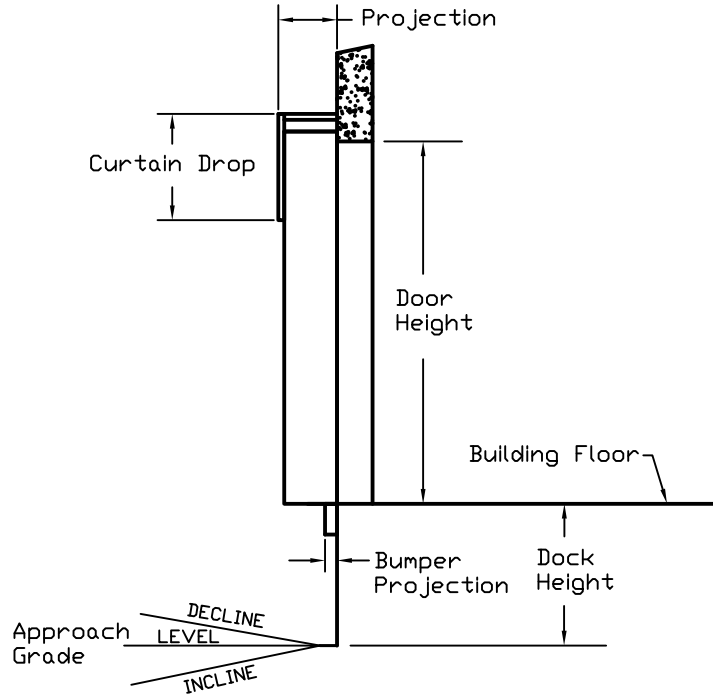
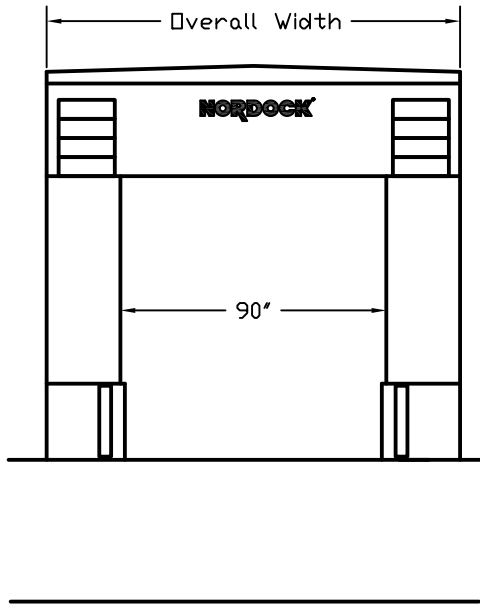


FOAMFRAME™ SERIES FOAM SIDED DOCK SHELTER

NORDOCK®

FEATURE SUMMARY

- Selection of High Tear Abrasion Resistant Fabrics
- Kiln Dried Pressure Treated Backing Lumber
- Polyurethane Foam Core With 99% Memory
- Double Lock Stitched With High Strength Thread
- Vertical Curtain Wear Caps With Yellow Guide Stripes
- Bottom Draft Pads
- Galvanized Steel Mounting Hardware

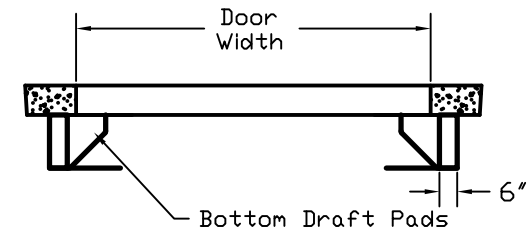

SITE DIMENSIONS

DOOR WIDTH: _____ "

DOOR HEIGHT: _____ "

DOCK HEIGHT: _____ "

BUMPER PROJECTION: _____ "

APPROACH GRADE: _____ % SLOPE

LEVEL DECLINE INCLINE

GRADE WALL EXTENSION: _____ "

BUILDING WALL SETBACK: _____ "

ORDER INFORMATION

BILL TO: _____

SHIP TO: _____

ORDER DATE: _____ QUANTITY _____

COST EACH: _____ TOTAL COST _____

PURCHASE ORDER NO. _____

NOTES: _____

MODEL FF SHELTER SPECIFICATIONS

PANEL FABRIC: 22OZ. VINYL

40 OZ. VINYL

50 OZ. WT-90

UNIT WIDTH: 132" OTHER _____ "

UNIT HEIGHT: 132" OTHER _____ "

SIDE CURTAIN: 21" OTHER _____ "

UNIT PROJECTION: 18" 24" 30" OTHER _____ "

TAPERED: BOTTOM _____ " TOP _____ "

HEAD CURTAIN: 30" DROP OTHER _____ "

TOUGH-SPLIT™ GUSSETS

OPTIONS: SPRAY GALVANIZED STEEL HEADER

TERMINATOR™ GAP SEAL

OTHER: _____

APPROVED BY: _____

NOTE: TERMINATOR SEALS ARE DESIGNED FOR STANDARD 102" WIDE TRAILERS AND REQUIRES THE VERTICAL SIDE CURTAINS TO BE 14" IN FRONT OF DOCK BUMPERS WITH A 90° CLEAR OPENING WIDTH.