

NVTL VERTICAL TELESCOPING-LIP™ LEVELER



NVTL FEATURES & BENEFITS

- Patent Pending TELESCOPING-LIP™ Eliminates End Load Issues with Precise Lip Extension Control
- Exclusive BUMPER-TO-BUMPER™ Pit Seal Protection Included – The First True Pit Seal
- No Front Lip Hinge Increases Product Life
- Eliminates Interference with Wall Mount Vehicle Restraints
- Deck and Lip Sensor Eliminates Mechanical Limit Switches
- Over-Center Vertical Storing Position
- Superior Environmental and Security Control
- Easy to Install. Easy to Operate
- Heavy-Duty Cylinders with Non-Adjustable Velocity Fuse
- Constant Power-Up, Power-Down Deck Functions
- 20" High Laminated Dock Bumpers Included
- Protects Overhead Door From Impact
- Run-Off Guard Protection on Deck
- NEMA 12 Dust Tight Control Panel
- Superior Warranties

SPECIFICATIONS

DESCRIPTION

The NVTL model TELESCOPING-LIP™ dock leveler provides the utmost in energy efficiency, safety, cleanliness and warehouse security.

User-friendly operation, superior strength and a diverse selection of product features and accessories ensure the NVTL provides reliability, functionality and unparalleled performance.

Equipped with exceptional safety and performance standards, load capacity ratings of 30,000, 40,000 or 50,000 lbs. and deck sizes of 7'x 6' and 7'x 8', the NVTL is built to exceed all expectations.

OPERATION

The operator raises and lowers the ramp with constant control of the push buttons. The lip can be extended and retracted at any time for quick cycle and infinite end load access.

The standard lip extension projects 15" beyond a 4" bumper. For additional safety the ramp is stored over-center in its vertical position.

Deck maintenance support with lock-out provided for improved safety and convenience.

CONSTRUCTION

The platform is a unitized welded structure with continuous welds at the beam, header plate and lugs for maximum strength.

Beams are welded to the deck plate on both sides in a superior 33% weld pattern along their full length.

The deck plate, lip plate, beam sections and lugs are constructed of minimum 55,000 PSI yield material.

The continuous rear hinge with stainless steel rod provides 4" side-to-side tilt with no pinch point and comes factory coated with anti-seize lubricant.

High visibility 4" high side run-off guards are welded to each side of the ramp assembly.

ELECTRICAL/HYDRAULICS

External wall or stand-mounted totally enclosed non-ventilated 1 HP power unit available in all voltages.


NEMA 12 dust tight control panel with motor starter, push button controls, emergency stop and operator instructions on hinged cover.

Hydraulic cylinders are a heavy-duty design with polished chrome rods, guide bearings and high-pressure seals. The hydraulic hoses are SAE 100R2 with permanent fittings attached.

SYSTEM INTEGRATION

Various equipment integration systems are available to provide a safe sequence of operation.

The dock leveler, door, vehicle restraint, air seal and communication lights should all be integrated to ensure an optimum safety system.

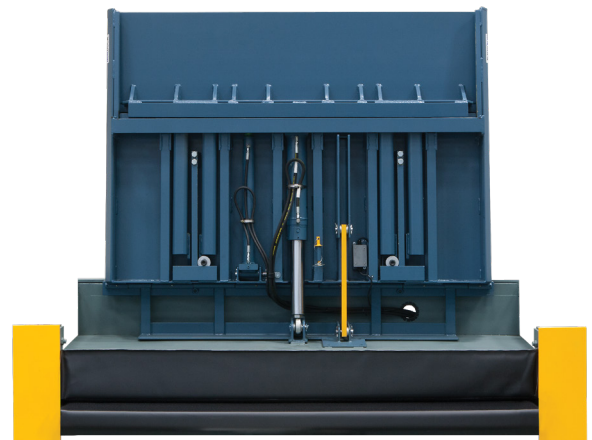

[CLICK HERE TO VIEW OUR NVTL VIDEO](#)

SUPERIOR WARRANTIES

20 Full Width Rear Hinge
YEAR

10 Structural
YEAR

5 Hydraulic
YEAR

www.nordockinc.com - sales-nordock@iwsolutions.com - Toll Free: 1-866-885-4276

NORDOCK® Inc. reserves the right to make changes to specifications without notice or obligation. NORDOCK® products are covered by numerous U.S. and Foreign patents and pending applications.

SUBMITTAL

PROJECT INFORMATION

Job Name: _____
 Address: _____
 General Contractor: _____
 Distributor: _____
 Model: _____
 Quantity: _____
 Capacity: 30K 40K 50K
 Voltage: Single Phase Three Phase 120V 208V
240V 480V 600V Other: _____
 Integrated Control: Yes No

CERTIFIED FOR CONSTRUCTION

Date: _____
 Company: _____
 Address: _____

MODELS & NOMINAL DIMENSIONS

MODEL*	WIDTH	LENGTH
NVTL-76	7' 0"	6'
NVTL-78	7' 0"	8'

*Add capacity required from 30,000, 40,000 or 50,000 lbs.
 Example: NVTL-76-40. Special sizes available upon request.

Contact a sales representative at **1-866-885-4276** or email sales@nordockinc.com for more information.

OPTIONS & ACCESSORIES

ADDITIONAL OPTIONS & ACCESSORIES

- 18" or 20" Long Lip
- Automatic Return to Dock Level
- Self-Forming Pour in Pans
- Spray Zinc Deck, Lip & Frame
- Dock Lights
- Rear Cast in Angle



FALL-STOP™
SAFETY BARRIER GATES



BRUSH & ALL-SEAL™
WEATHER SEAL SYSTEMS



SMART-HOOK® & TRUCK-LOCK®
VEHICLE RESTRAINTS



LOGI-SMART® & INTEGRATED
CONTROL PANEL



10-YEAR STRUCTURAL WARRANTY

IMPACT™ SERIES STEEL SPRING
& STEEL FACE DOCK BUMPERS



WEARTOUGH®
DOCK SEALS & SHELTERS

www.nordockinc.com - sales-nordock@iwsolutions.com - Toll Free: 1-866-885-4276

NORDOCK® Inc. reserves the right to make changes to specifications without notice or obligation. NORDOCK® products are covered by numerous U.S. and foreign patents and pending applications.