


MODEL IS-950 INFLATABLE DOCK SHELTER



FEATURE SUMMARY

- HIGH TEAR ABRASION RESISTANT 16 OZ. FABRIC
- 1/2 HP 115V MOTOR BLOWER
- PRESSURE TREATED WOOD FRAME
- TRANSLUCENT OUTER PANELS
- DOUBLE STITCHED WITH HIGH STRENGTH THREAD
- STEEL SIDE FRAME GUARDS
- ON/OFF SWITCH WITH PILOT LIGHT
- BOTTOM CORNER DRAFT SEALS
- GALVANIZED STEEL MOUNTING HARDWARE

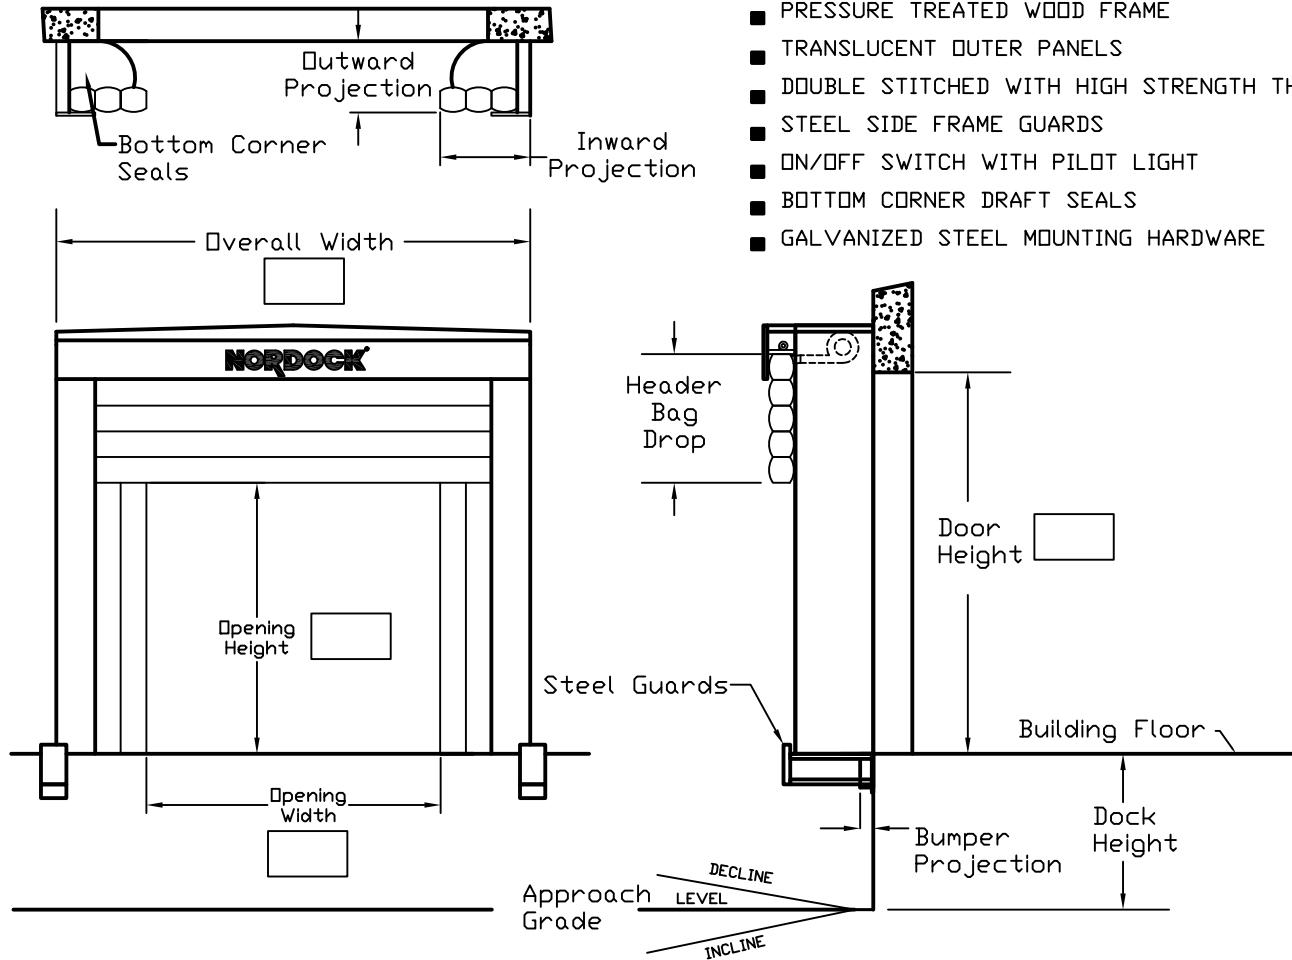

SITE DIMENSIONS

DOOR WIDTH: _____"

DOOR HEIGHT: _____"

DOCK HEIGHT: _____"

BUMPER PROJECTION: _____"

APPROACH GRADE: _____ % SLOPE

INCLINE DECLINE SPLIT DECLINE _____" LEVEL

GRADE WALL EXTENSION: _____"

BUILDING WALL SETBACK: _____"

SHELTER SPECIFICATIONS/OPTIONS

BASE FABRIC: 16OZ. VINYL 16 OZ. HYPALON

UNIT WIDTH: 138' OTHER _____"

UNIT HEIGHT: 142' OTHER _____"

INWARD PROJ.: 24' OTHER _____"

OUTWARD PROJ.: 24' OTHER _____"

HEADER BAG DROP: 48' OTHER _____"

OPTIONS: PAINTED STEEL FRAME

GALVANIZED STEEL FRAME

STATIONARY VERTICAL PANELS

EXTRA INWARD PROJECTION _____"

OTHER: _____

ORDER INFORMATION

BILL TO: _____

SHIP TO: _____

ORDER DATE: _____ QUANTITY _____

COST EACH: _____ TOTAL COST _____

PURCHASE ORDER NO. _____

NOTES: _____
