



WEARTOUGH® SERIES MODEL STP FOAM PAD DOCK SEAL

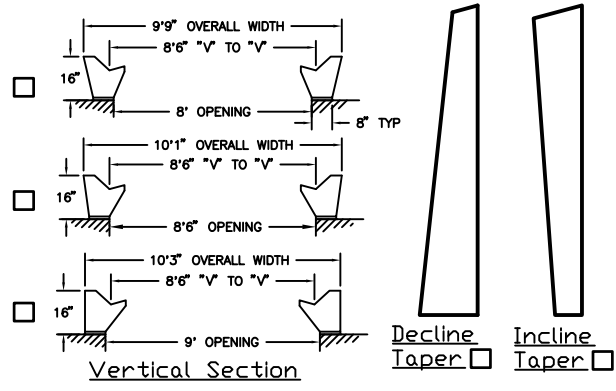

FEATURE SUMMARY

- Polyurethane Foam Core With 99% Memory
- High Tear Abrasion Resistant Fabrics
- Kiln Dried Pressure Treated Backing Lumber
- Double Lock Stitched With High Strength Thread
- Full Height Yellow Guide Stripes for Driver Positioning
- Bottom Vents to Release Condensation
- 3" Inside Bottom Flaps
- Galvanized Steel Mounting Hardware

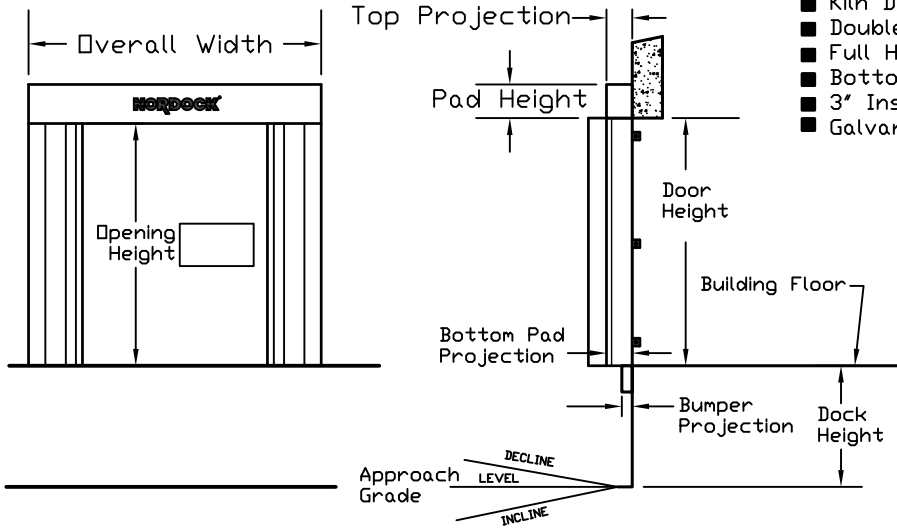

SITE DIMENSIONS

DOOR WIDTH: _____ "

DOOR HEIGHT: _____ "

DOCK HEIGHT: _____ "

BUMPER PROJECTION: _____ "

APPROACH GRADE: _____ % SLOPE

INCLINE DECLINE LEVEL

GRADE WALL EXTENSION: _____ "

BUILDING WALL SETBACK: _____ "

TOTAL WALL TO FRONT OF BUMPER: _____ "

ORDER INFORMATION

BILL TO: _____

SHIP TO: _____

ORDER DATE: _____ QUANTITY _____

COST EACH: _____ TOTAL COST _____

PURCHASE ORDER NO. _____

APPROVED BY: _____

SEAL SPECIFICATIONS/OPTIONS

BASE FABRIC: 22OZ. VINYL 40 OZ. VINYL
50 OZ. WT-90 (BLACK ONLY)

COLOR: BLACK BLUE BROWN

WEAR PLEATS: 22 OZ. VINYL 40 OZ. VINYL
50 OZ. WT-90
EXPOSURE 4" 6" 8"

SIDE PAD: HEIGHT _____ "
BUILD OUT: TOP _____ " BOTTOM _____ "

HEAD PAD: WIDTH _____ " HEIGHT _____ "
PROJECTION _____ "

DROP CURTAIN: 12" 18" 24" OTHER _____ "

OPTIONS: EXTRA LAYER ON INSIDE FACE
EXTRA LAYER ON HEAD PAD FACE
SKID GUARD: 48" HIGH FULL HT
FACE FABRIC: 40 OZ. WT-90
GALVANIZED STEEL BACK
WOOD BUILD OUT

OTHER: _____

