



MULTI-SEAL™ SERIES MODEL MS

NORDOCK®

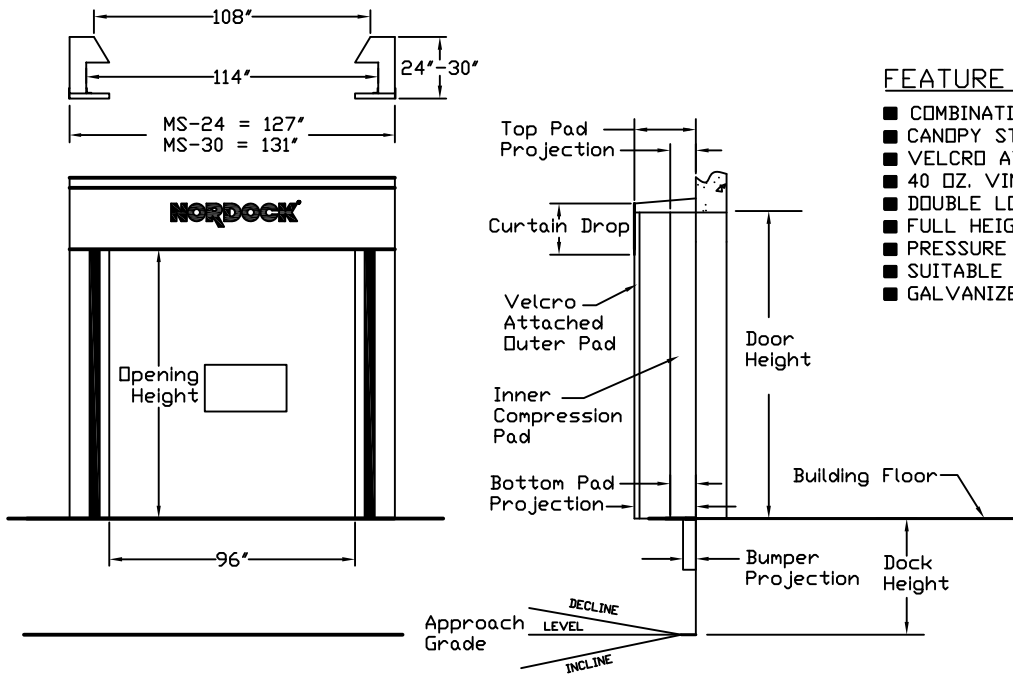

FEATURE SUMMARY

- COMBINATION COMPRESSION & WIPER SEAL
- CANOPY STYLE HEAD CURTAIN WITH VELCRO SPLITS
- VELCRO ATTACHED OUTER PAD WITH WEAR FACE
- 40 OZ. VINYL FABRIC WITH 8" PLEATS ON INNER FACE
- DOUBLE LDKC STITCHED WITH HIGH STRENGTH THREAD
- FULL HEIGHT YELLOW GUIDE STRIPES
- PRESSURE TREATED SUPERIOR GRADE LUMBER
- SUITABLE FOR UP TO 9' WIDE x 10' HIGH DOORS
- GALVANIZED STEEL MOUNTING HARDWARE

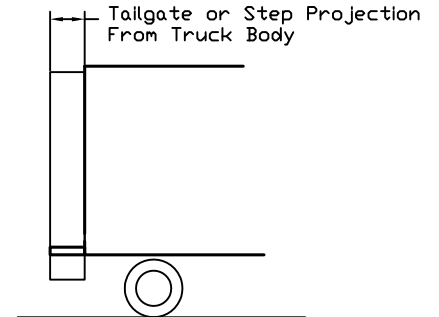

SITE DIMENSIONS

DOOR WIDTH: _____ "

DOOR HEIGHT: _____ "

DOCK HEIGHT: _____ "

BUMPER PROJECTION: _____ "

APPROACH GRADE: _____ % SLOPE

INCLINE DECLINE LEVEL

GRADE WALL EXTENSION: _____ "

BUILDING WALL SETBACK: _____ "

TAILGATE/STEP PROJECTION: _____ "

ORDER INFORMATION

BILL TO: _____

SHIP TO: _____

ORDER DATE: _____ QUANTITY _____

COST EACH: _____ TOTAL COST _____

PURCHASE ORDER NO. _____

NOTES: _____

SEAL SPECIFICATIONS/OPTIONS

MODEL: MS-24 MS-30

BASE FABRIC: 40 OZ. VINYL 50 OZ. WT-90

OUTER PAD: PROJECTION: TOP _____" BOTTOM _____"

WEAR PLEATS: 40 OZ. WT-90

EXPOSURE: 4" 6" 8"

FRONT FACE: 15-1/2" 17-1/2"

OTHER _____"

WEAR FACE: 40 OZ. WT-90

INNER PAD: PROJECTION: TOP _____" BOTTOM _____"

WEAR PLEATS: 40 OZ. WT-90

EXPOSURE 4" 6" 8"

PAD HEIGHT: 120" OTHER _____"

HEAD CURTAIN: WIDTH: 127" 131"

DROP: 24" OTHER _____"

SPLIT HEIGHT: 18" OTHER _____"

FOAM FILLED: 12" 18"

OTHER: _____

NOTES: Overall seal projection is either 24" for MS-24 or 30" for MS-30 and should allow a minimum of 6" truck body penetration.