


HYDRAULIC DOCK LEVELERS



True Full Width Rear Hinge

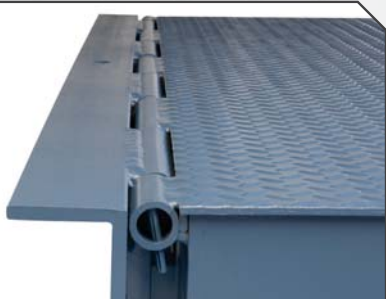

Patented Lip Lug and Header Plate Design

FEATURES & BENEFITS

- 20-Year Front and Rear Hinge Warranties
- Patented Lip Lug and Header Plate Design Ensures Maximum Strength
- Heavy Duty Hydraulics with Patented Dual Function Cylinder
- Continuous Fixed Rear Hinge with Six Solid Steel Supports & No Pinch Point
- Superior 33% Deck to Beam Weld Pattern
- Dust-Tight Control Panel Enclosure
- Security Night Locks
- Self-Cleaning Lip Hinge
- Open Frame Design for Easy Pit Cleaning
- Integral Separate Deck and Lip Maintenance Supports
- Full Operating Range Telescoping Side Guards
- Zinc Coated Front and Rear Hinge Rods
- Center Deck Reinforcement
- Heavy-Duty Hydraulics with 5-Year Warranty

DEDICATED PEOPLE – SUPERIOR PRODUCTS

HYDRAULIC DOCK LEVELERS SPECIFICATIONS

DESCRIPTION

The DUAL-DUTY™ Series of hydraulic dock levelers are a major break through in simplicity, strength, convenience and reliability.

Patented system utilizes a single hydraulic cylinder that lifts the deck and extends the lip with a push of a button.

Available in 25,000 to 50,000 lb. capacities, in 5,000 lb. increments and standard nominal sizes of 6 feet wide x 6 feet long to 7 feet wide x 10 feet long.

Standard features include full operating range telescoping side guards, and a comprehensive warranty.

OPERATION

The operator presses the control button until the deck is raised and the lip is fully extended. Releasing the button allows the lip to lower onto the truck bed.

The operator stores the leveler by pressing the control button until the lip fully retracts. The standard 16" long lip projects 11" beyond a 4" bumper to engage a truck bed 12" above or below floor level.

CONSTRUCTION

The platform is a unitized welded structure with continuous welds at the beam, header plate and lug connections for maximum strength. The deck plate, lip plate, beam sections and lugs are constructed of minimum 50-55,000 PSI yield material.

A standard center deck reinforcement beam and welded side guards provide additional deck plate support. The continuous rear hinge provides 4" of side-to-side tilt with no pinch point. The frame has six solid steel rear supports, an open front design for easy pit cleaning, and lip supports that prevent illegal entry when the door is closed. The front and rear hinge rods are SAE 1045 material, zinc plated and factory coated with anti-seize lubricant.

ELECTRICAL/HYDRAULICS

The power unit is a frame mounted integral assembly fully tested and oil filled. The motor is a totally enclosed non-ventilated type available in all voltages.

The control box is a dust-tight enclosure with motor starter, thermal overload and single push button.

The hydraulic cylinder is a heavy-duty design with a polished chrome rod, guide bearing and high-pressure seals. The hydraulic hose is SAE 100R2 with permanent fittings attached.

Consult your NORDOCK representative for assistance in choosing the correct capacity and options for your application.


MODELS & NOMINAL DIMENSIONS

| Model* | Width | Length |
|----------|-------|--------|
| ND-66 | 6'0" | 6'0" |
| ND-68 | 6'0" | 8'0" |
| ND-610 | 6'0" | 10'0" |
| ND-6.56 | 6'6" | 6'0" |
| ND-6.58 | 6'6" | 8'0" |
| ND-6.510 | 6'6" | 10'0" |
| ND-76 | 7'0" | 6'0" |
| ND-78 | 7'0" | 8'0" |
| ND-710 | 7'0" | 10'0" |

*Add capacity required. Example: Model ND-68-50 = 6' wide x 8' long x 50,000 pound capacity. Special sizes also available.



SMART-HOOK® & TRUCK-LOCK®
VEHICLE RESTRAINTS



LOGI-SMART™ INTEGRATED
CONTROL PANEL



IMPACT™ SERIES
DOCK BUMPERS



WEARTOUGH®
DOCK SEALS & SHELTERS

OPTIONS &
ACCESSORIES

WARRANTIES

20
YEAR
Exclusive Lip
Lug and
Header Plate

5
YEAR
Hydraulic

20
YEAR
Full Width
Rear Hinge

10
YEAR
Structural

ADDITIONAL OPTIONS & ACCESSORIES

- Emergency Stop Control
- FALL-STOP™ Safety Barrier Gates
- 18" or 20" Long Lip
- Automatic Return to Dock Level
- Brush Weather Seals
- Dock Lights

www.nordockinc.com – Email: sales@nordockinc.com – Toll Free: 1-866-885-4276

DEDICATED PEOPLE – SUPERIOR PRODUCTS